



Features

- Spacious bathing area with molded lumbar support and arm rests for bathing comfort
- Easy installation for both new construction and remodel projects
- Secure to subfloor, screw flange direct to stud
- No predrilling or clips required
- Covered with protective film to protect finish during installation
- Reinforced integral apron with supports

Dimensions	Model #	Shipping Weight
60" x 30" x 16" SFR Right - White	ET01603016R	71 lbs
60" x 30" x 16" SFR Right - Biscuit	ET09603016R	71 lbs
60" x 30" x 16" SFR Left - White	ET01603016L	71 lbs
60" x 30" x 16" SFR Left - Biscuit	ET09603016L	71 lbs

Color Options*



01
White





09
Biscuit



**Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

60" x 30" x 16"
45 Gallons
Standard Floor Rough

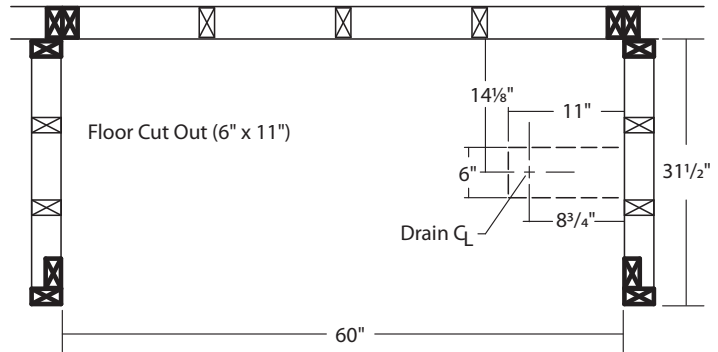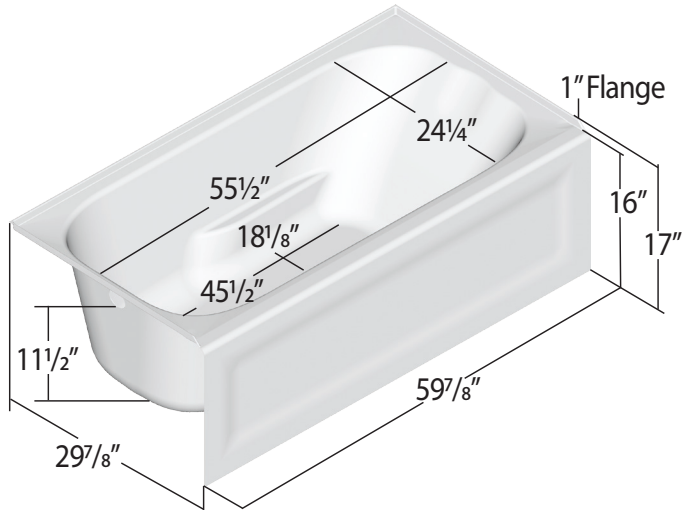


☒ = required stud location

☒ = suggested stud location

RH installation shown - reverse for LH installation.

Reinforced 7-Layer Construction
for Zero-Flex Durability.

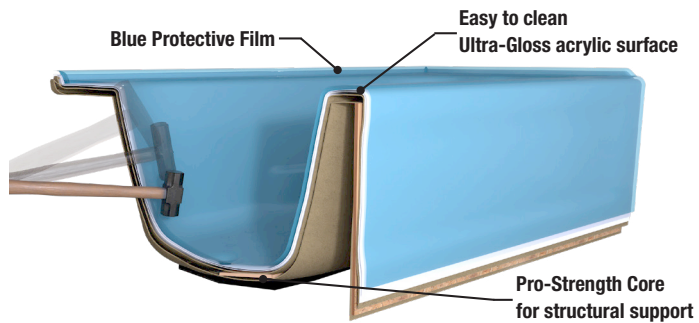

The Manufacturer
certifies conformance
to the following
requirements:
CSA B45.5-17
IAPMO Z124-2017

Lyons

Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of $+$ or $-$ 1/8".

Printed in U.S.A.