



Features

- Spacious bathing area with molded lumbar support and arm rests for bathing comfort
- Easy installation for both new construction and remodel projects
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Covered with protective film to protect finish during installation
- Reinforced integral apron with supports


Dimensions

Model

Shipping Weight

54" x 30" x 19" AFR Right - White	ETL01543019R	64 lbs
54" x 30" x 19" AFR Right - Biscuit	ETL09543019R	64 lbs
54" x 30" x 19" AFR Left - White	ETL01543019L	64 lbs
54" x 30" x 19" AFR Left - Biscuit	ETL09543019L	64 lbs
54" x 30" x 19" AFR Center - White	ETL01543019C	64 lbs
54" x 30" x 19" AFR Center - Biscuit	ETL09543019C	64 lbs

Color Options*



01
White




09
Biscuit




**Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

54" x 30" x 19"
39 Gallons
Above Floor Rough

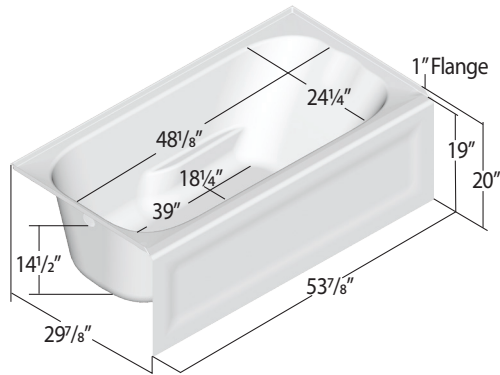


Max Door Threshold Width 3-1/2"
Back of tub to center drain is 14-3/16"
Side of tub with overflow to center drain is 8-3/4"

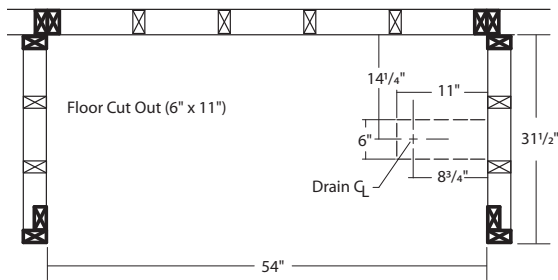


☒ = required stud location
☒ = suggested stud location

RH installation shown - reverse for LH installation.

54" x 30" x 19"
39 Gallons
Above Floor Rough

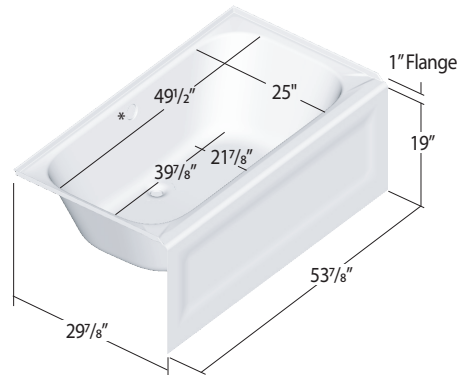


Max Door Threshold Width 3-1/2"
Center drain version does not have an arm rest
Back of tub to center drain is 6-1/2"
*Overflow to bottom of drain is 11-1/4"
Right Side of tub to center drain is 26-15/16"

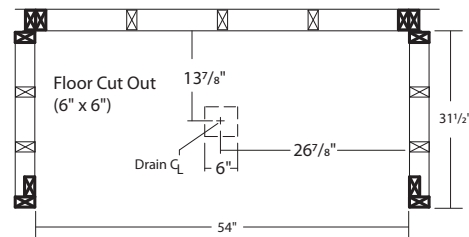

☒ = required stud location
☒ = suggested stud location

Reinforced 7-Layer Construction
for Zero-Flex Durability.

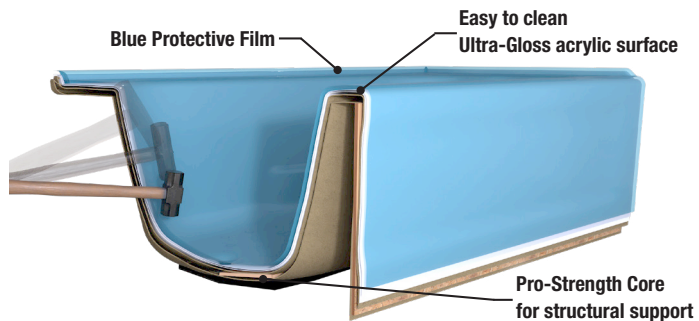

Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of [+/-] 1/8".

Printed in U.S.A.