




Features

- High gloss acrylic surface
- Scratch and stain resistant
- Spacious slip resistant area
- Reinforced with fiberglass and A Pro-Strength Core for maximum support
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Covered with protective film to maintain finish and protect during installation

Dimensions	Model #	Shipping Weight
54" x 27" x 5-1/2" AFR Right - White	LEBL01542755R	32 lbs
54" x 27" x 5-1/2" AFR Right - Biscuit	LEBL09542755R	32 lbs
54" x 27" x 5-1/2" AFR Left - White	LEBL01542755L	32 lbs
54" x 27" x 5-1/2" AFR Left - Biscuit	LEBL09542755L	32 lbs


Color Options*




01
White




09
Biscuit



34
Glacier Marble



38
Luna Gray





40
Luna Pearl



**Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

54" x 27" x 5-1/2"

Above Floor Rough

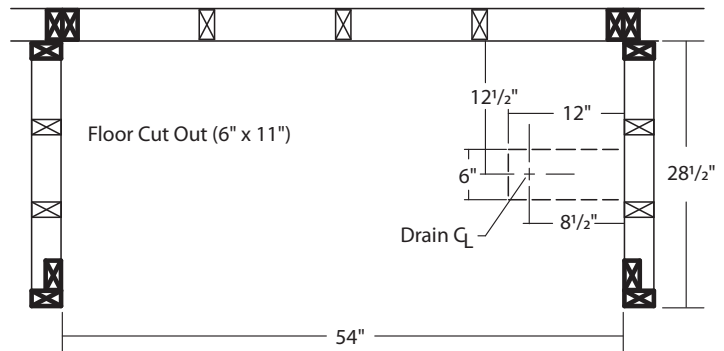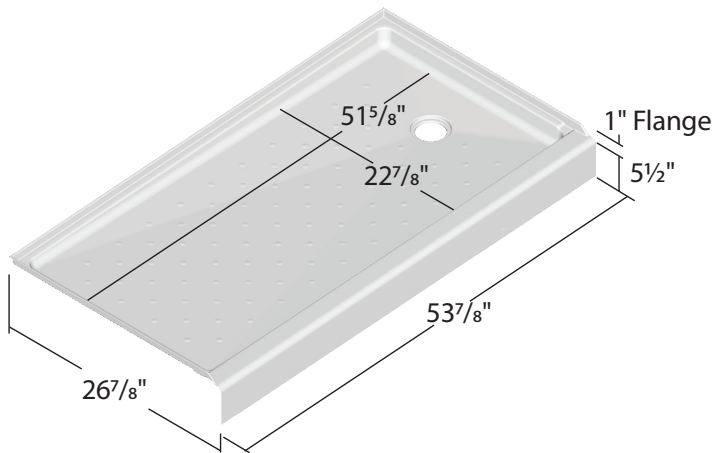


⊗ = required stud location

⊠ = suggested stud location

RH installation shown - reverse for LH installation.

Reinforced 7-Layer Construction
for Zero-Flex Durability.

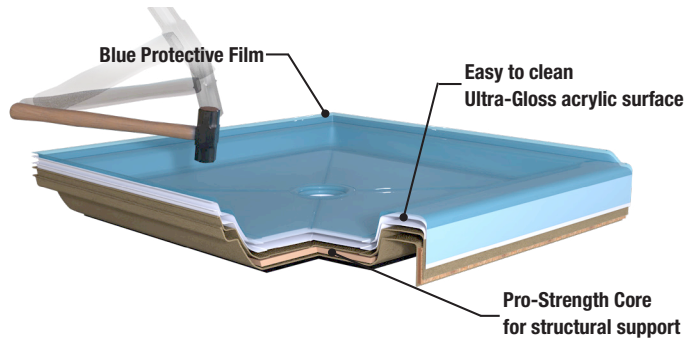

The Manufacturer
certifies conformance
to the following
requirements:
CSA B45.5-17
IAPMO Z124-2017

Lyons

Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of $\pm$ or $\mp$ 1/8".

Printed in U.S.A.