



## Features

- Spacious bathing area with molded lumbar support for bathing comfort
- Easy installation for both new construction and remodel projects
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Covered with protective film to protect finish during installation
- Reinforced integral apron with supports

| Dimensions                             | Model #      | Shipping Weight |
|----------------------------------------|--------------|-----------------|
| 60" x 30" x 19" SFR<br>Right - White   | LLT01603019R | 74 lbs          |
| 60" x 30" x 19" SFR<br>Right - Biscuit | LLT09603019R | 74 lbs          |
| 60" x 30" x 19" SFR<br>Left - White    | LLT01603019L | 74 lbs          |
| 60" x 30" x 19" SFR<br>Left - Biscuit  | LLT09603019L | 74 lbs          |

## Color Options\*



01  
White





09  
Biscuit



*\*Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

60" x 30" x 19"  
63 Gallons  
Standard Floor Rough

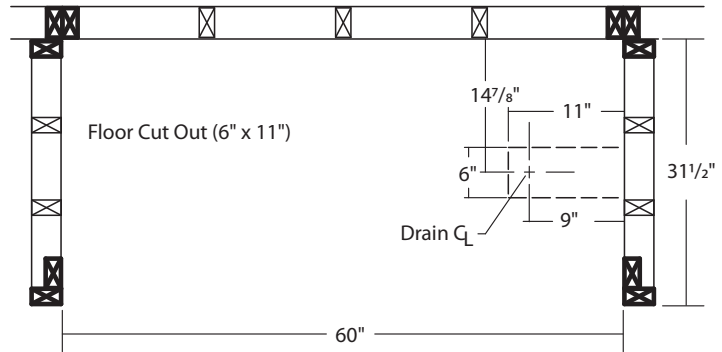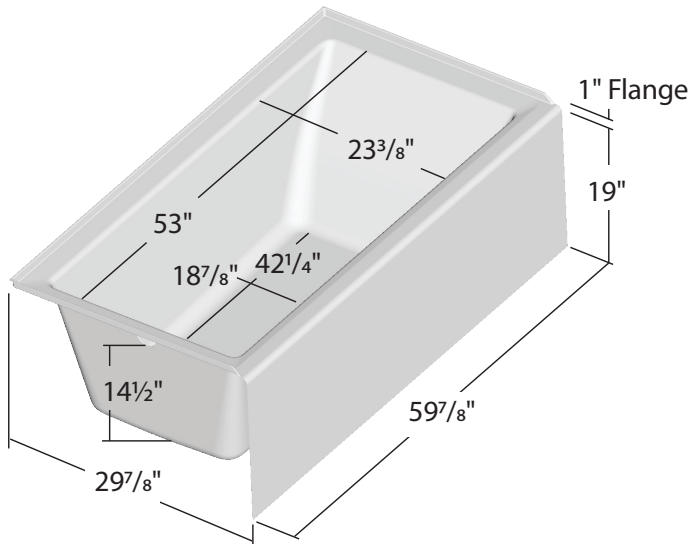


⊗ = required stud location

⊠ = suggested stud location

RH installation shown - reverse for LH installation.

Reinforced 7-Layer Construction  
for Zero-Flex Durability.

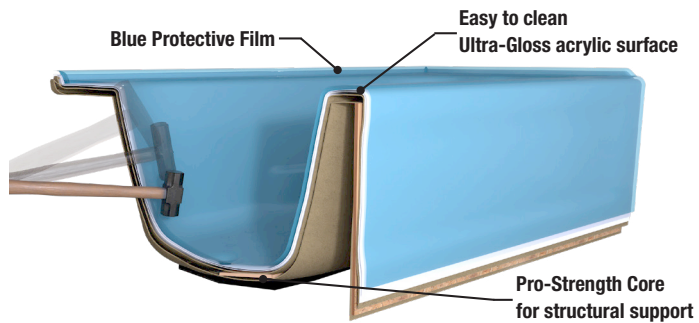

## Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of  $[\pm]$  or  $[-]$  1/8".

Printed in U.S.A.