




Features

- Spacious bathing well for comfort
- Easy installation for both new construction and remodel projects
- Reinforced integral apron
- Removable access cover
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Covered with a protective film to maintain finish during installation

Dimensions	Model #	Shipping Weight
54" x 54" x 19-3/4" AFR - White	SXT01545419	100 lbs
54" x 54" x 19-3/4" AFR - Biscuit	SXT09545419	100 lbs

Color Options*



01
White




09
Biscuit




**Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

54" x 54" x 19-3/4"
59 Gallons
Above Floor Rough

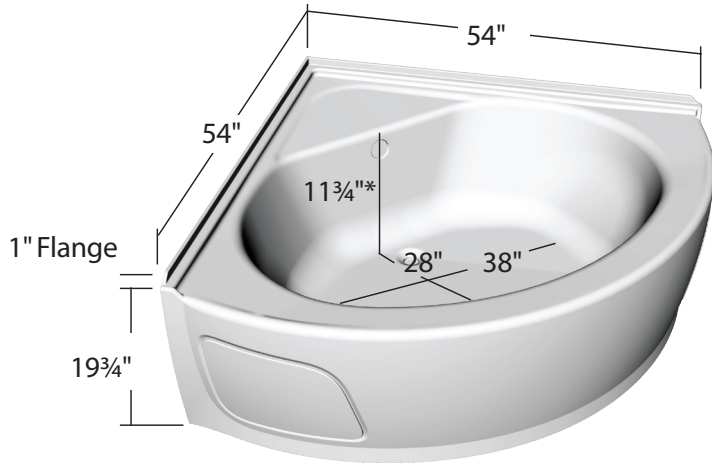


*Bottom of Overflow to Drain

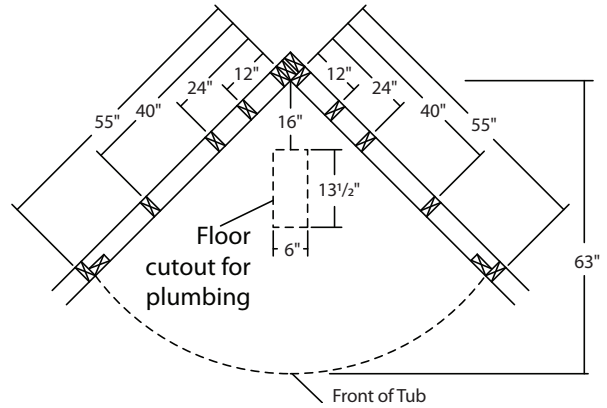

= required stud location

= suggested stud location

Reinforced 7-Layer Construction
for Zero-Flex Durability.

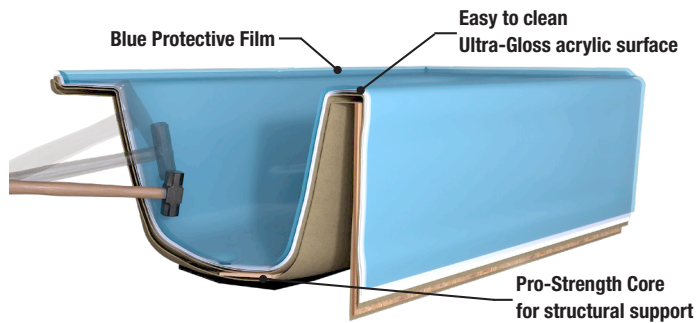

The Manufacturer
certifies conformance
to the following
requirements:
CSA B45.5-17
IAPMO Z124-2017

Lyons

Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of $\pm$ or $\mp$ 1/8".

Printed in U.S.A.