




## Features

- High gloss acrylic surface
- Scratch and stain resistant
- 10-1/2" tall foot rests
- Spacious slip resistant area for showering
- Easy to install for both new construction and remodel projects
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Covered with a protective film to maintain finish during installation

| Dimensions                             | Model #       | Shipping Weight |
|----------------------------------------|---------------|-----------------|
| 54" x 42" x 19" AFR<br>Right - White   | VGBL01544219C | 70 lbs          |
| 54" x 42" x 19" AFR<br>Right - Biscuit | VGBL09544219C | 70 lbs          |

## Color Options\*



01  
White





09  
Biscuit



*\*Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

# 54" x 42" x 19" Above Floor Rough

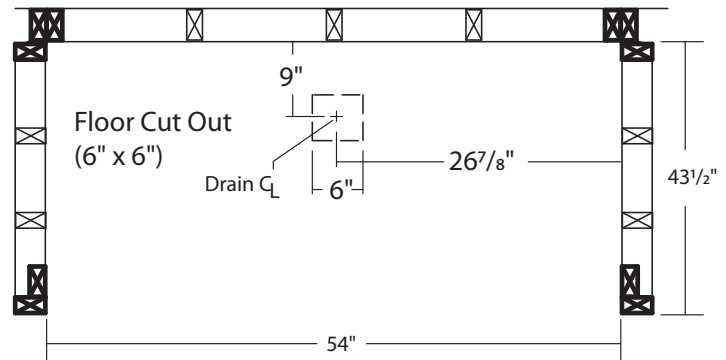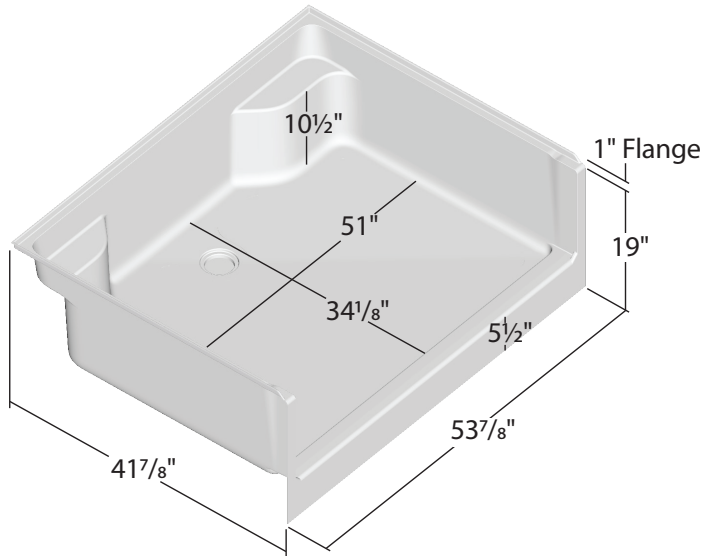


⊗ = required stud location

⊠ = suggested stud location

RH installation shown - reverse for LH installation.

Reinforced 7-Layer Construction  
for Zero-Flex Durability.

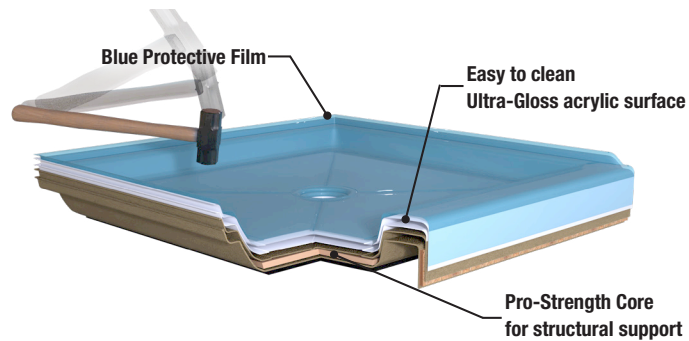

The Manufacturer  
certifies conformance  
to the following  
requirements:  
CSA B45.5-17  
IAPMO Z124-2017

Lyons

## Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of  $\pm$  or  $\pm$  1/8".

Printed in U.S.A.