




Features

- Head and Lumbar support for bathing comfort
- Easy to install for both new construction and remodel project
- Secure to subfloor, screw flange direct to studs
- No predrilling or clips required
- Reinforced with fiberglass and A Pro-Strength Core for maximum support
- Covered with a protective film to maintain finish during installation

Dimensions	Model #	Shipping Weight
54" x 27" x 16 AFR Right - White	VTL01542716R	50 lbs
54" x 27" x 16 AFR Right - Biscuit	VTL09542716R	50 lbs
54" x 27" x 16 AFR Left - White	VTL01542716L	50 lbs
54" x 27" x 16 AFR Left - Biscuit	VTL09542716L	50 lbs
54" x 27" x 16 AFR Center - White	VTL01542716C	50 lbs
54" x 27" x 16 AFR Center - Biscuit	VTL09542716C	50 lbs

Color Options*



01
White




09
Biscuit




**Color shown may vary slightly from the actual product due to variations in the printing process of this document. Plumbing accessories not included.*

54" x 27" x 16"
28 Gallons
Above Floor Rough

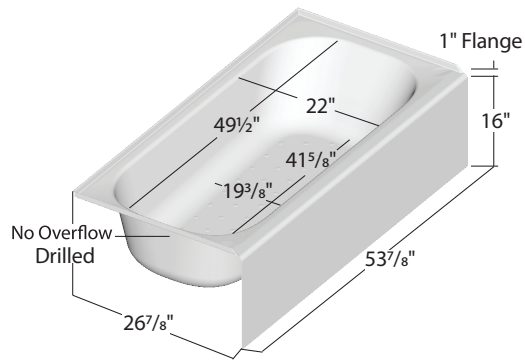


Max Door Threshold
Width 2-3/4"

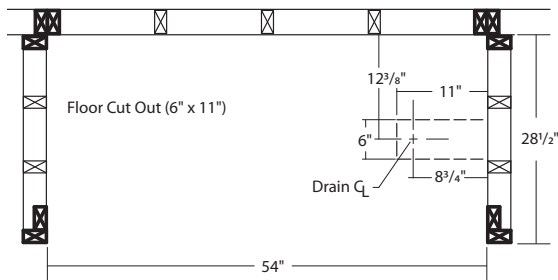


⊗ = required stud location
⊗ = suggested stud location

RH installation shown - reverse for LH installation.

54" x 27" x 16"
28 Gallons
Above Floor Rough

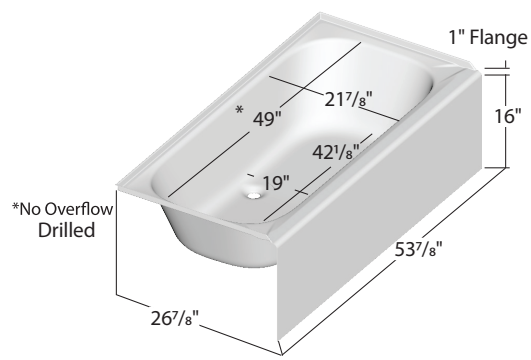


Max Door Threshold
Width 2-3/4"

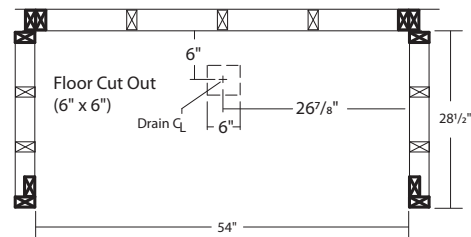

⊗ = required stud location
⊗ = suggested stud location

Reinforced 7-Layer Construction
for Zero-Flex Durability.

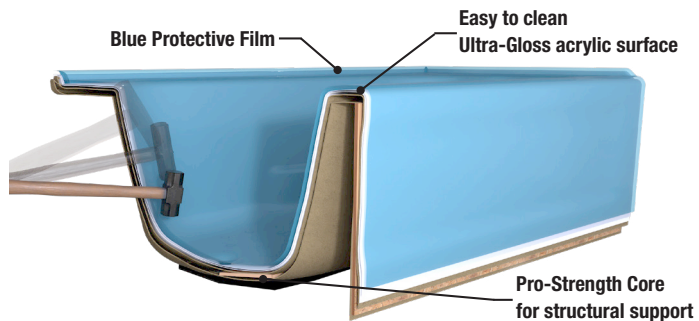

Contact Us

Lyons Industries, Inc.

30000 M-62 West Dowagiac, MI 49047

(800) 458-9036

LyonsSupport@lyonsindustries.com

www.lyonsindustries.com

Design and features may change without notice.

Complies with ANSI Z124.1 and CAN/CSA-B45

CAN/ULC S102.2 Flame-75 & Smoke Developed-485 code.

Complies with ASME:A1.19.7 and CAN/CSA-B45.10

All product subject to manufacturing tolerance of $+$ or $-$ 1/8".

Printed in U.S.A.